


Qty.	Description
1	<p data-bbox="204 383 295 405">SQ 2-35</p>  <p data-bbox="595 725 1062 748" style="text-align: center;">Note! Product picture may differ from actual product</p> <p data-bbox="204 757 478 779">Product No.: On request</p> <p data-bbox="204 792 1430 844">3" multi-stage, submersible pump designed for domestic water supply, liquid transfer in tanks, irrigation and environmental applications. The pump has "floating" impellers, each with its own tungsten carbide/ceramic bearing.</p> <p data-bbox="204 916 1457 967">The pump features soft starting and protection against dry-running, upthrust, overvoltage, undervoltage, overload and overtemperature.</p> <p data-bbox="204 1010 1457 1061">The motor is a single-phase motor of the permanent magnet rotor type ensuring optimum efficiency within a wide load range.</p> <p data-bbox="204 1068 842 1090">The motor is fitted with a replaceable end cover with socket.</p> <p data-bbox="204 1135 695 1301"> Liquid: Pumped liquid: Water Liquid temperature range: 0 .. 35 °C Selected liquid temperature: 20 °C Density: 998.2 kg/m³ </p> <p data-bbox="204 1346 1249 1547"> Technical: Pump speed on which pump data are based: 10700 rpm Rated flow: 2 m³/h Rated head: 35 m Approvals: CE,PCBC,RCM,EAC,CN Rohs Exempt,Morocco,UKCA,SEPRO Curve tolerance: ISO9906:2012 3B </p> <p data-bbox="204 1597 933 1906"> Materials: Pump: Stainless steel EN 1.4301 AISI 304 Impeller: Composite ZYTEL 70G30 HSLR PA6.6-GF30 Motor: Stainless steel DIN W.-Nr. 1.4301 AISI 304 </p> <p data-bbox="204 1955 655 2085"> Installation: Maximum operating pressure: 15 bar Pump outlet: RP1 1/4 Minimum borehole diameter: 76 mm </p>




Company name: Peake International Development
Created by: John Peake
Phone: +1.682.521.2129
Email: john@johnpeake.dev
Date: 27/06/2026

Qty.	Description
1	<p>Electrical data:</p> <p>Motor type: MS3</p> <p>Power input - P1: 1 kW</p> <p>Rated power - P2: 0.7 kW</p> <p>Power (P2) required by pump: 0.47 kW</p> <p>Mains frequency: 50 Hz</p> <p>Rated voltage: 1 x 200-240 V</p> <p>Rated current: 5.2 A</p> <p>Power factor: 1.00</p> <p>Rated speed: 10700 rpm</p> <p>Start. method: direct-on-line</p> <p>Enclosure class (IEC 34-5): IP68</p> <p>Insulation class (IEC 85): F</p> <p>Length of cable: 1.5 m</p> <p>Motor No: 96160850</p> <p>Others:</p> <p>Net weight: 4.42 kg</p> <p>Gross weight: 5.14 kg</p> <p>Shipping volume: 0.0092 m³</p> <p>Danish VVS No.: 388432435</p> <p>Country of origin: DK</p> <p>Custom tariff no.: 84137000</p>




Company name: Peake International Development
Created by: John Peake
Phone: +1.682.521.2129
Email: john@johnpeake.dev
Date: 27/06/2026


On request SQ 2-35 50 Hz

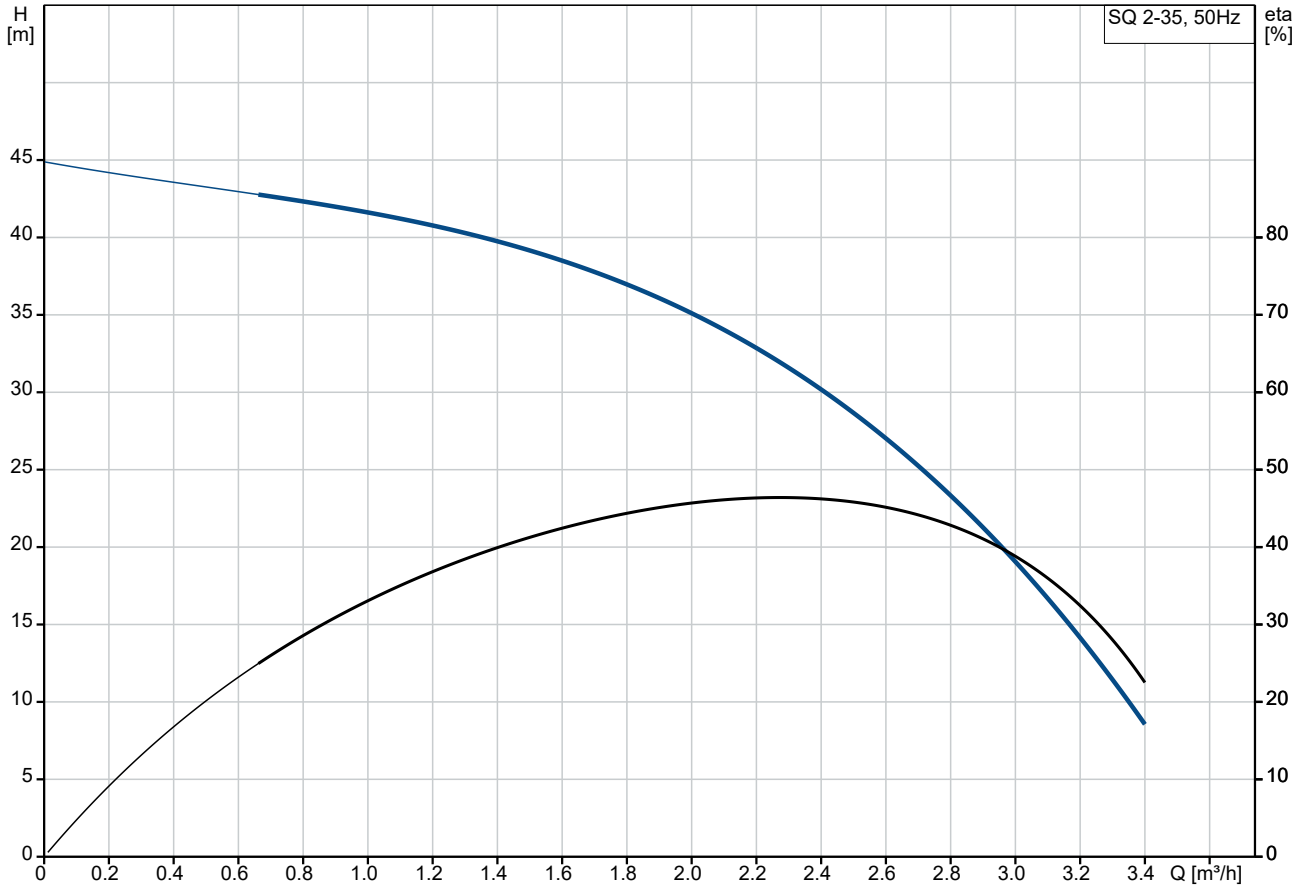


Pumped liquid = Water
Liquid temperature during operation = 20 °C
Density = 998.2 kg/m³

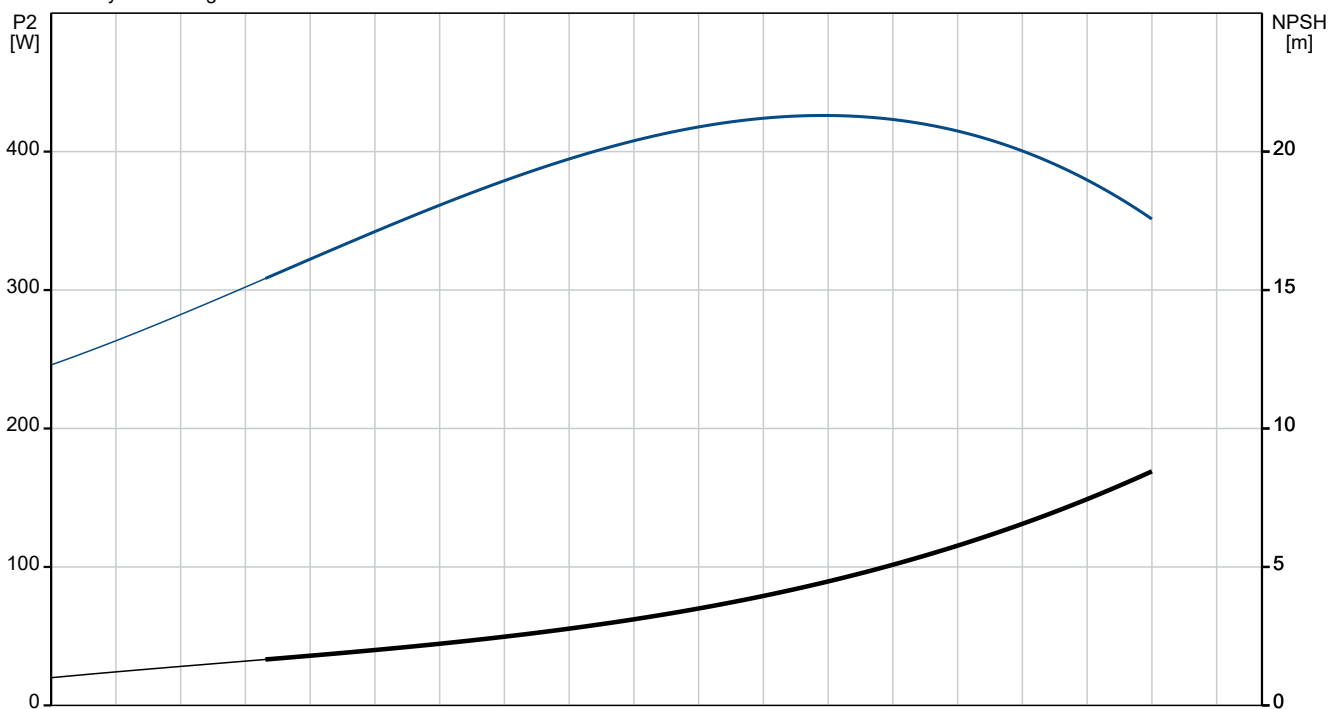

Description	Value
General information:	
Product name:	SQ 2-35
Product No:	On request
EAN number:	On request
Price:	EUR 876
Technical:	
Pump speed on which pump data are based:	10700 rpm
Rated flow:	2 m ³ /h
Rated head:	35 m
Stages:	2
Approvals:	CE,PCBC,RCM,EAC,CN Rohs Exempt,Morocco,UKCA,SEPRO
Curve tolerance:	ISO9906:2012 3B
Pump No:	96080384
Model:	C
Valve:	pump with built-in non-return valve
Materials:	
Pump:	Stainless steel EN 1.4301 AISI 304
Impeller:	Composite ZYTEL 70G30 HSLR PA6.6-GF30
Motor:	Stainless steel DIN W.-Nr. 1.4301 AISI 304
Installation:	
Maximum operating pressure:	15 bar
Pump outlet:	RP1 1/4
Minimum borehole diameter:	76 mm
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	0 .. 35 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m ³
Electrical data:	
Motor type:	MS3
Power input - P1:	1 kW
Rated power - P2:	0.7 kW
Power (P2) required by pump:	0.47 kW
Mains frequency:	50 Hz
Rated voltage:	1 x 200-240 V
Rated current:	5.2 A
Power factor:	1.00
Rated speed:	10700 rpm
Start. method:	direct-on-line
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Built-in motor protection:	Y
Thermal protec:	internal
Length of cable:	1.5 m
Motor No:	96160850
Controls:	
CU 300/CU 301:	no communication possible
Others:	
Net weight:	4.42 kg

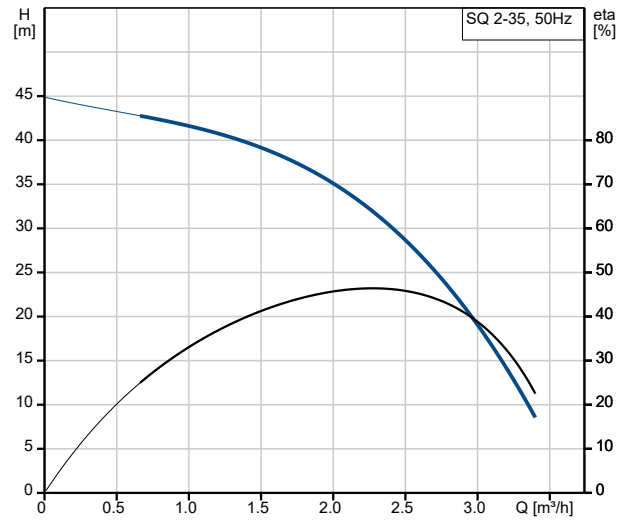

Pumped liquid = Water
 Liquid temperature during operation = 20 °C
 Density = 998.2 kg/m³

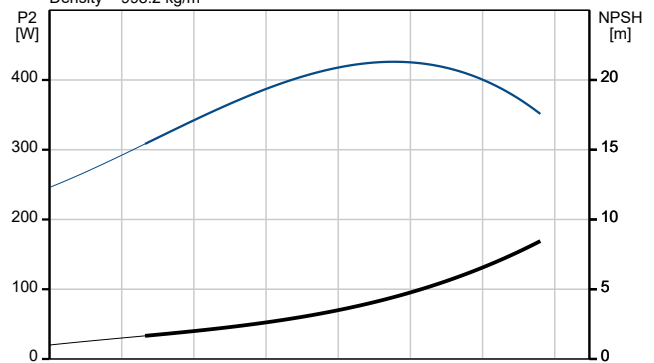




Company name: Peake International Development
Created by: John Peake
Phone: +1.682.521.2129
Email: john@johnpeake.dev
Date: 27/06/2026

Description	Value
Gross weight:	5.14 kg
Shipping volume:	0.0092 m ³
Sales region:	EU/S-AMREG/APREG
Danish VVS No.:	388432435
Country of origin:	DK
Custom tariff no.:	84137000

On request SQ 2-35 50 Hz

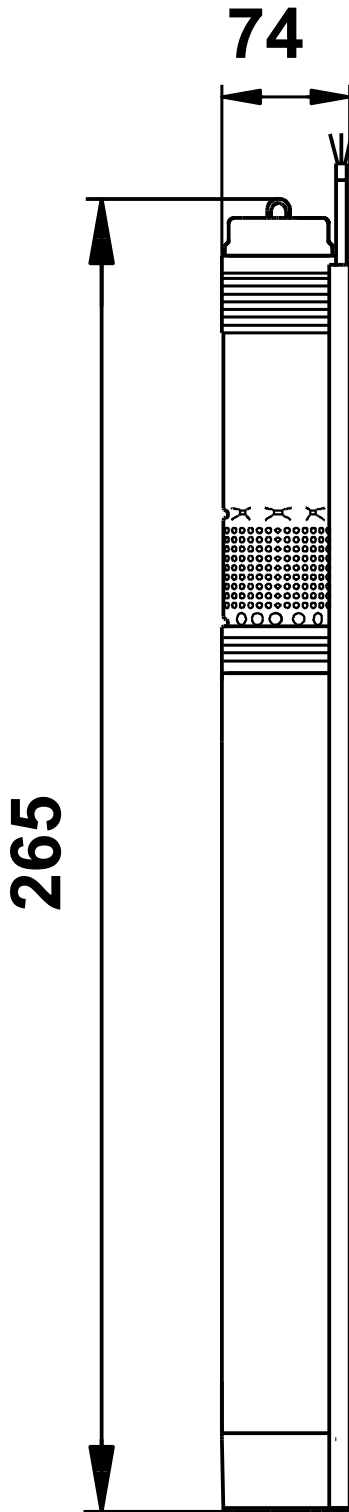

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.